


Performance curves


Submersible pumps
SP 14A

SP 14A

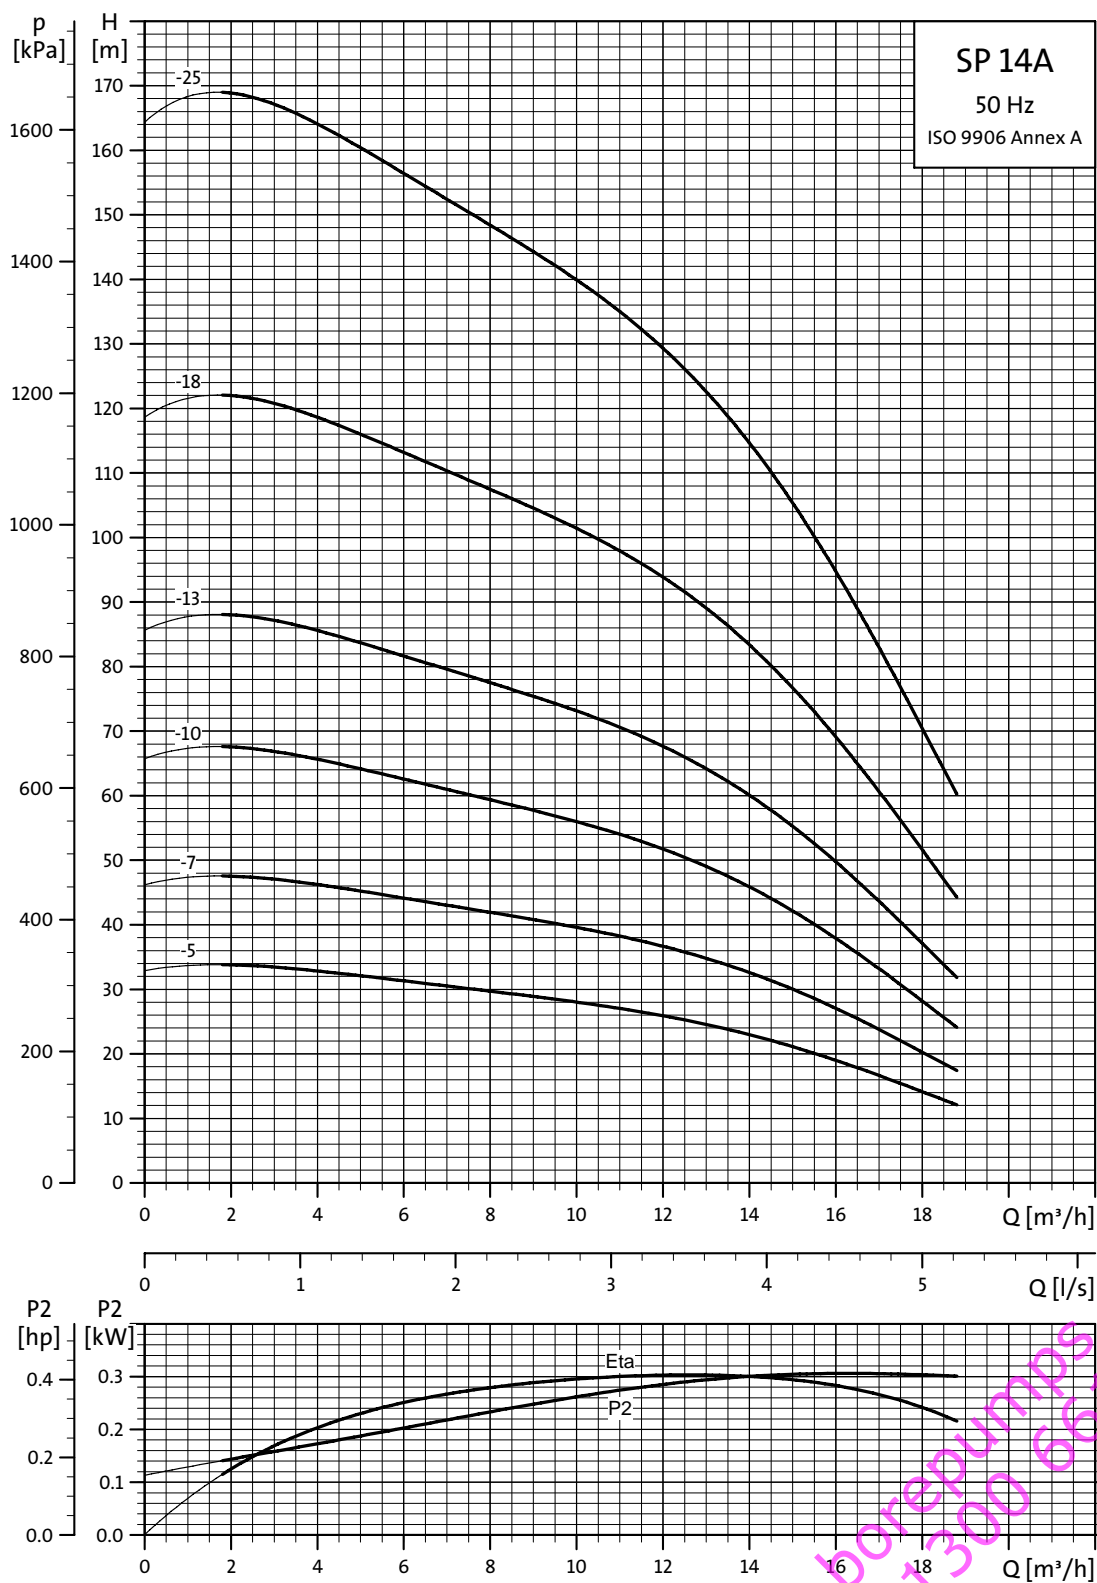

Explanation of efficiency curve, please see "Curve conditions" on page 4.

Dimensions and weights

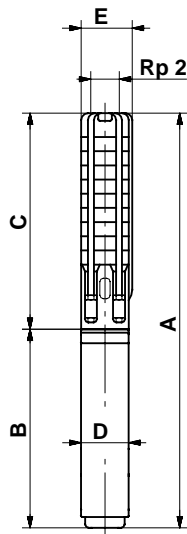

TM00 0857 1196

Pump type	Motor		Dimensions [mm]						Net weight [kg]		
	Type	Power [kW]	C	B		A		D	E		
				1x230V	3x230V 3x400V	1x230V	3x230V 3x400V			1x230V	3x230V 3x400V
SP 14A-5	MS 402	1.5	510	346	346	856	856	95	101	18	17
SP 14A-7	MS 4000	2.2	640	573		1213		95	101	29	
SP 14A-7	MS 402	2.2	640		346		986	95	101		19
SP 14A-10	MS 4000	3.0	835		493		1328	95	101		27
SP 14A-13	MS 4000	4.0	1030		573		1603	95	101		33
SP 14A-18	MS 4000	5.5	1355		673		2028	95	101		41
SP 14A-25	MS 4000	7.5	1810		773		2584	95	101		67
SP 14A-18	MS6	5.5	1417		535		1952	143	138		52
SP 14A-25	MS6	7.5	1872		565		2437	143	138		60

E = Maximum diameter of pump inclusive of cable guard and motor.

www.borepumps.com.au
Ph 1300 661 417